

Never Furl™ Installation Kit

Each Kit contains the following items:


- 2 Never Furl Bushings (A & D)
- 2 Shaft Collars with Allen Screws (B & C)
- 4 Stainless Steel Rings (E & F) (*In later kits, plastic clips replace the 2 outside rings*)
- 1 Allen Wrench

Before Installing:

Your Never Furl™ kit is exceptionally easy to install. The kit contains everything you need, no additional tools are required. Before you begin, carefully read the following steps and examine the detailed drawing.

Installation Procedures:

1. After assembling the flag pole slip Never Furl Bushing (A) over top of pole, tab end first (see drawing).
2. Slip both shaft collars (B&C) over top of pole.
3. Slip second Never Furl Bushing (D) with tab to top of pole.
4. Position top Never Furl Bushing (D) on the pole about 1/4 " from end of pole or bottom of ornament.. Slide the shaft collar (C) to 1 to 1 1/2" from the bottom of the bushing and secure screw with Allen wrench.
5. Gently pry apart the outer ring (E) on top of bushing and loop it through grommet on top of flag. Make sure the rings hang naturally and do not twist (see drawing).
6. In the same manner pry apart the outer ring on the lower bushing (F) and attach lower grommet of flag. Again make sure that the rings hang naturally and do not twist.
7. **Important:** When positioning the bottom bearing in place, be sure to leave 1 to 1 1/2" slack in the flag or banner before tightening the bottom collar. Tighten the bottom collar's set screw with the Allen wrench.

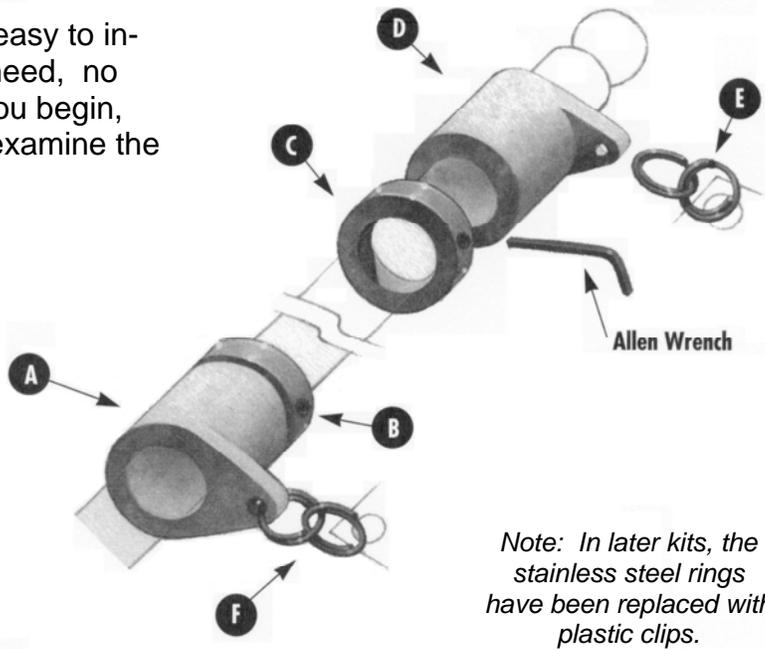

Note: In later kits, the stainless steel rings have been replaced with plastic clips.

Congratulations ... Your Flag will not fly without tangling!

**U.S. Patent #5,375,555
Made in the U.S.A.**